



**LAM-É  
ST-PIERRE**

lamestpierre.com

**ÉLINGUES RONDES / ROUND SLINGS**

CODE	*CHARGE LIMITE (lb) LOAD LIMIT (lb)			LARGEUR WIDTH	
L-3	LX-300	3 000	2 400	6 000	2"
L-4	LX-400	4 000	3 200	8 000	2"
L-6	LX-600	6 000	4 800	12 000	2"
L-9	LX-900	9 000	7 200	18 000	3"
L-12	LX-1200	12 000	9 600	24 000	3"
L-14	LX-1400	14 000	11 200	28 000	3"
L-17	LX-1700	17 000	13 600	34 000	3"
L-23	LX-2300	23 000	18 400	46 000	4"
L-26	LX-2600	26 000	20 800	52 000	4"
L-32	LX-3200	32 000	25 600	64 000	4"
L-40	LX-4000	40 000	32 000	80 000	5"
L-54	LX-5400	54 000	43 200	108 000	6"
L-68	LX-6800	68 000	54 400	136 000	6"
L-90	LX-9000	90 000	72 000	180 000	8"
LXC-1000		10 000	8 000	20 000	3"
LXC-1500		15 000	12 000	30 000	3"
LXC-2000		20 000	16 000	40 000	3"
LXC-2500		25 000	20 000	50 000	3"
LXC-3000		30 000	24 000	60 000	3"
LXC-4000		40 000	32 000	80 000	4"
LXC-4500		45 000	36 000	90 000	4"
LXC-5000		50 000	40 000	100 000	4"
LXC-6000		60 000	48 000	120 000	4"
LXC-7000		70 000	56 000	140 000	5"
LXC-8500		85 000	68 000	170 000	5"
LXC-10000		100 000	80 000	200 000	6"
LXC-12500		125 000	100 000	250 000	6"
LXC-15000		150 000	120 000	300 000	6"
LXC-17500		175 000	140 000	350 000	8"
LXC-20000		200 000	160 000	400 000	8"
LXC-25000		250 000	200 000	500 000	10"
LXC-27500		275 000	220 000	550 000	10"
LXC-30000		300 000	240 000	600 000	10"

**ÉLINGUES SYNTHÉTIQUES / SYNTHETIC WEB SLINGS**

**TYPE SPN-1, SPN-2, SPN-3, SPN-4**



LARGEUR WIDTH	*CHARGE LIMITE (lb) / LOAD LIMIT (lb)					
	1 ÉPAISSEUR / 1-PLY			2 ÉPAISSEURS / 2-PLY		
1"	1 600	1 280	3 200	3 100	2 480	6 200
2"	3 100	2 480	6 200	6 200	4 960	12 400
3"	4 700	3 760	9 400	8 800	7 040	17 600
4"	6 200	4 960	12 400	11 000	8 800	22 000
5"	7 800	6 240	15 600	13 700	10 960	27 400
6"	9 300	7 440	18 600	16 500	13 200	33 000
8"	11 800	9 440	23 600	22 700	18 160	45 400
10"	14 700	11 760	29 400	28 400	22 720	56 800
12"	17 600	14 080	35 200	34 100	27 780	68 200

**TYPE SPN-5**

1"	3 200	2 560	6 400	6 200	4 960	12 400
2"	6 200	4 960	12 400	12 400	9 920	24 800
3"	9 400	7 520	18 800	17 600	14 080	35 200
4"	12 400	9 920	24 800	22 000	17 600	44 000
5"	15 600	12 480	31 200	27 400	21 920	54 800
6"	18 600	14 880	37 200	33 000	26 400	66 000

**5:1** FACTEUR DE SÉCURITÉ  
DESIGN FACTOR


\* Capacité des élingues synthétiques (nylon ou polyester) selon classe 7.  
En conformité avec ASME B30.9.  
Load limit for nylon or polyester slings as per class 7.  
In accordance with ASME B30.9.

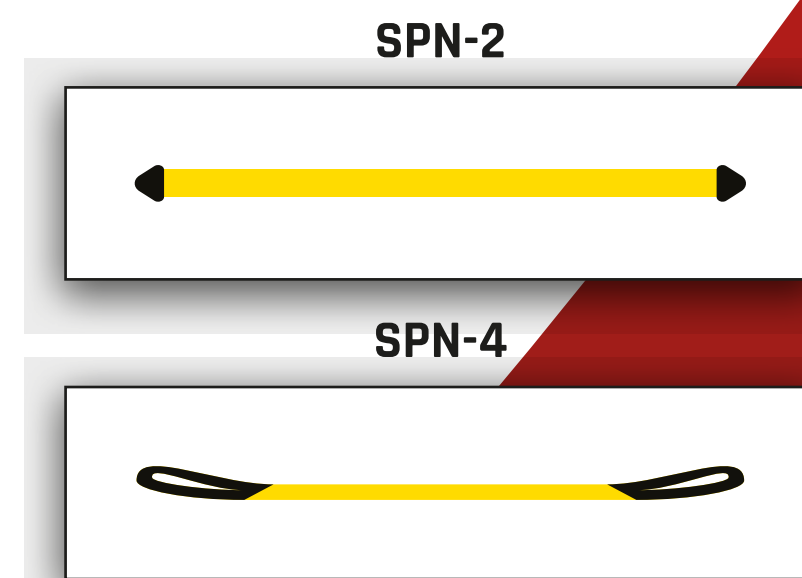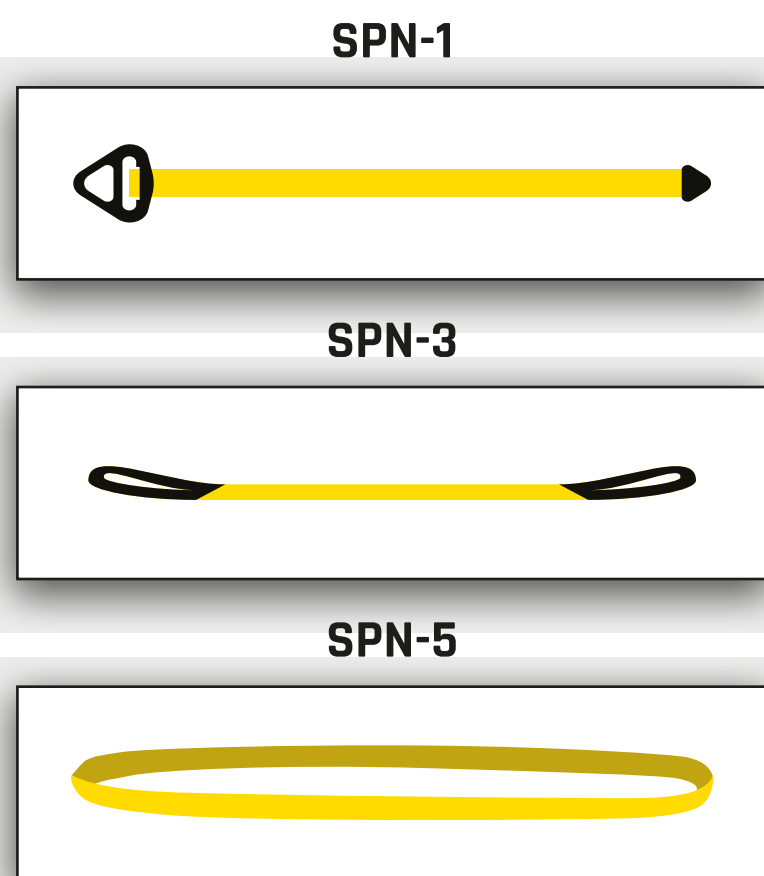

**LES PROS  
DU LEVAGE ET DE LA SÉCURITÉ  
S'ÉQUIPENT ICI**

**ATTACHE  
À ÉTRANGLEMENT**

Une attache à étranglement maintient 80% de la capacité d'une élingue simple à attache verticale si les coins de la charge sont protégés et si l'angle horizontal est supérieur à 30°.

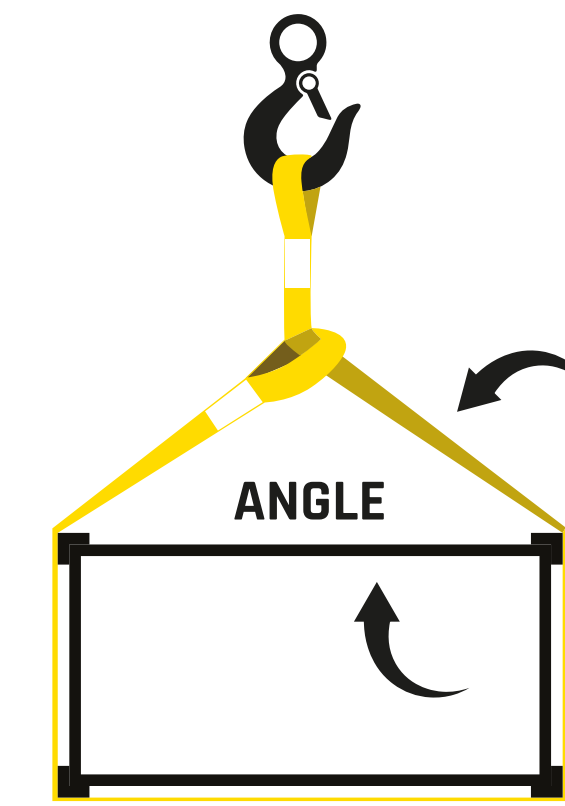


**CHOKER  
HITCH SLING**

A choker hitch sling can hold 80% of the capacity of a vertical single hitch sling if the load angles are protected and if the horizontal angle is larger than 30°.

**ATTACHE  
EN PANIER**

Angle Horizontal	Capacité d'une élingue simple, attache verticale
90°	200%
60°	170%
45°	140%
30°	100%

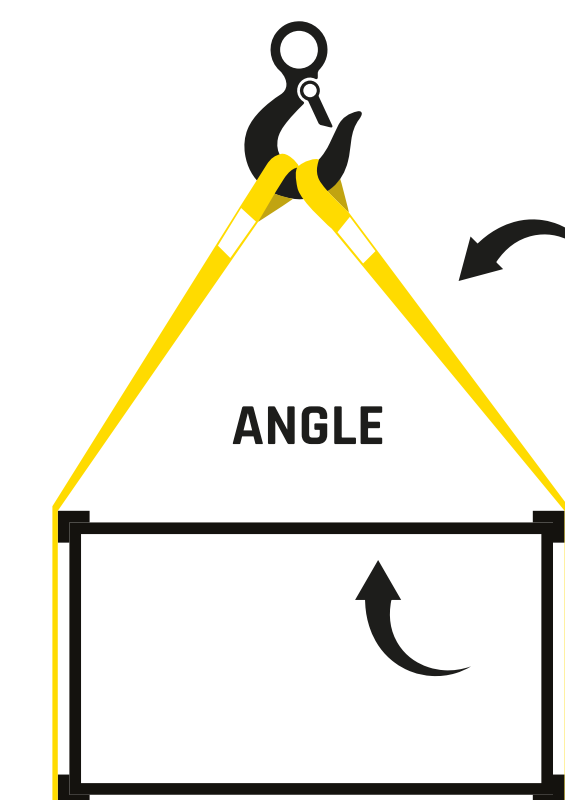

**BASKET  
HITCH SLING**

Horizontal Angle	Capacity of a vertical hitch single sling
90°	200%
60°	170%
45°	140%
30°	100%

**THIS IS WHERE  
THE LIFTING AND SAFETY PROS  
GEAR UP**